

Trim Tab Installation

Model Number: MTK12V, MTK24V


Note: All hinge related nuts and bolts have been treated with red permanent Loctite. Removal of any of these components voids the warranty.

Parts Included:



- (2) Trim tabs
- (2) Hydraulic pumps (12V or 24V)
- (1) Complete bolt kit for both trim tabs

TOGGLE SWITCH
 BLUE = UP
 GREEN = DOWN
 BLACK = GROUND
 RED = 12V or 24V

+ 12V or 24V power source
 12V Systems are not to be used in a 24V application.

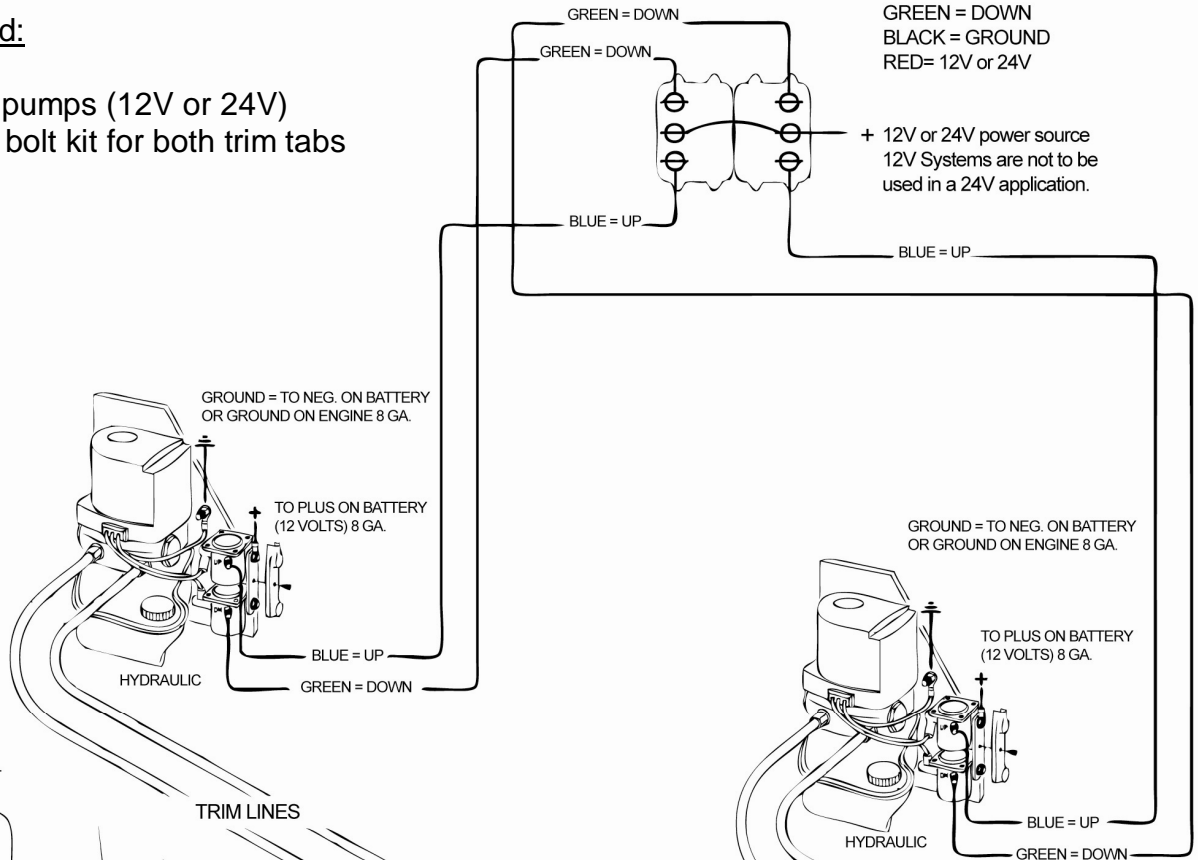

MOUNT TRIM TABS 1/4 INCH UP FROM THE BOTTOM OF THE BOAT

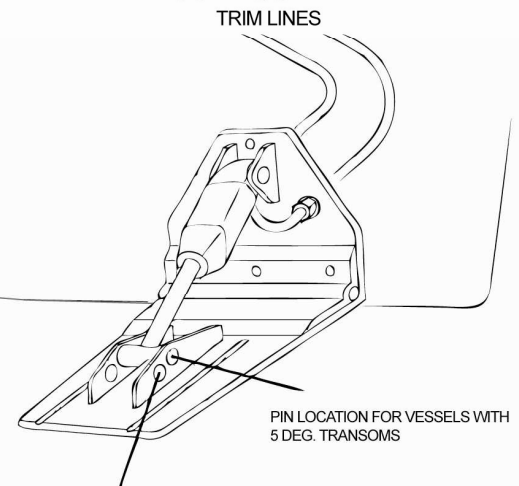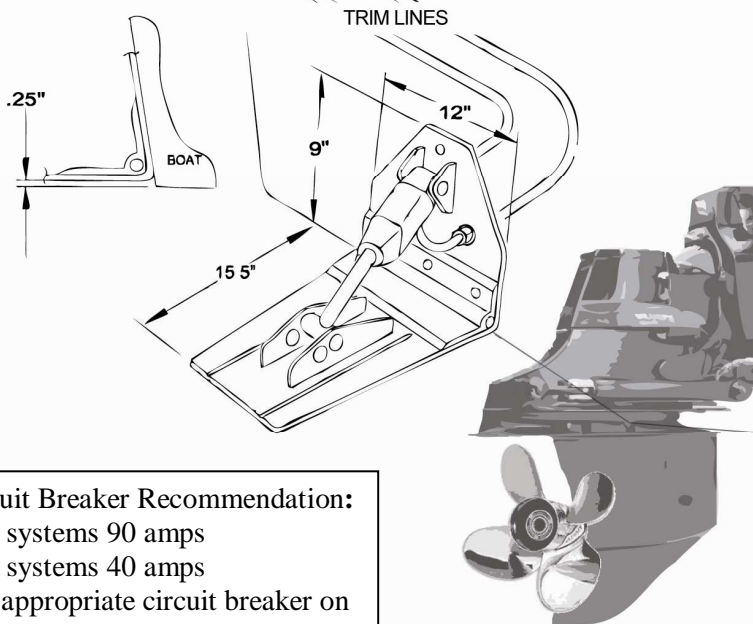

Circuit Breaker Recommendation:
 12V systems 90 amps
 24V systems 40 amps
 Use appropriate circuit breaker on main trim pump power supply.

PIN LOCATION FOR VESSELS WITH 12 DEG. TRANSOMS



IMPORTANT INFORMATION REGARDING YOUR LIVORSI TRIM TABS

Trim Tab Installation

Model Number: MTK12V, MTK24V

- Use silicone sealer on all through transom fittings and bolts
- After all hydraulic lines and reservoirs are installed and tightened, fill pump to the max with Dexron II or III ATF (automatic transmission fluid)
- Cycle both tabs up and down several times checking for leaks (pump is self bleeding)
- Refill reservoir tank to the max fill line
- Do not overfill reservoir tank
- Be sure the lower cylinder pin is in the proper pivot hole

Circuit Breaker Recommendation

12V systems - 90 amps

24V systems - 40 amps

Use appropriate circuit breaker on main trim pump power supply.

**Note: All hinge related nuts and bolts have been treated with red permanent Loctite.
Removal of any of these components voids the warranty.**